

LIGHT STRIP 1500 MM

Mounting	Track mounting
Lamps description	Top LED 42W 2934 lm 3000K CRI 85
Voltage (V)	24
Environment	Indoor
Notes	To avoid overload problems, the installation of an independent 240W power supply source is recommended for every 8 m installed (equivalent consumption to 5 - 1.5 m Light Strip modules).



OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	90°

Light Strip 1500 mm designed by FLOS Architectural

Diffused LED light module to be installed in The Running Magnet System. 50/75/100% regulation of the light intensity with built-in regulator. Remote 24V power supply not included.




ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without

● 03.6250.14 Black

PHYSICAL

Length (mm)	1500
Weight (kg)	2,37

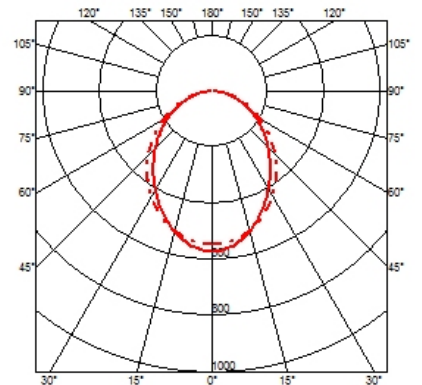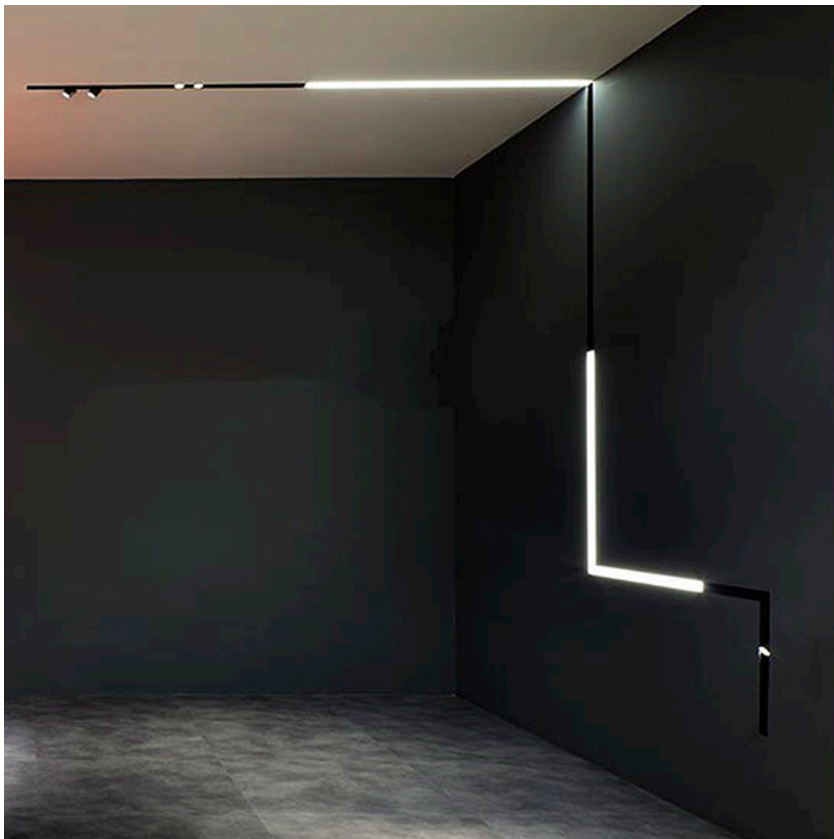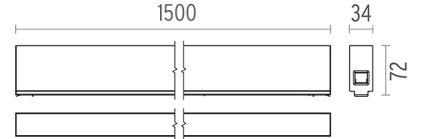

Light Strip 1500 mm . Lamps



Top LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Top LED



Light Strip 1500 mm designed by FLOS Architectural

Diffused LED light module to be installed in The Running Magnet System. 50/75/100% regulation of the light intensity with built-in regulator. Remote 24V power supply not included.

● 03.6250.14 Black

