




STEP

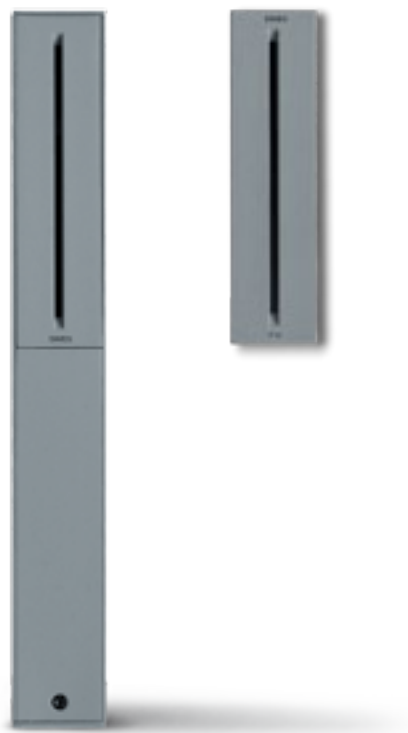

www.simes.it/step

Die-cast EN AB-47100 aluminium housing (copper free) with high corrosion resistance.
 Extruded EN AW-6060 aluminium structure (bollard version) with high corrosion resistance.
 Stainless steel screws.
 Clear toughened glass diffuser.
 Single cable entry.
 Silicone gaskets.
Double powdered paint in 3 step process:
 _ surface treatment containing ceramic nano particles (Bonderite);
 _ epoxy primer paint;
 _ polyester powder paint with high resistance against UV rays and harsh weather conditions.

LED luminaire supplied with LED circuit board.

IP65
 CLASS I
 IK 06



"Le Palafitte" discotheque, Suizzano (Brescia), Italy © Gianattilio Valli

COLOURS:


- White (code .01)
- Aluminium grey (code .14)
- Rusty corten (code .18)



RECESSING BOX


All STEP wall recessed luminaires must be installed with the recessing box.

The recessing box must be perfectly installed at the intersection point between the vertical and the horizontal plane for graze level installations, and about 20cm from the ground for different effects.




VANDAL PROOF VERSION

A version with tamper proof fastening screws is also available for outdoor applications.



LED BLUE available on request




STEP WALL RECESSED




S.4655 
 With leds white 6000K 236lm
 Rated luminaire luminous flux 22lm

S.4655W 
 With leds white 3200K 194lm
 Rated luminaire luminous flux 16lm

Rated input power 3W 230V
 Recessing box not included

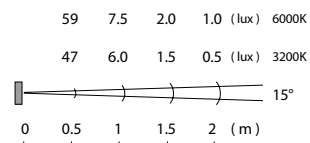


S.4653
RECESSING BOX
 for STEP WALL RECESSED
 80 x 210 mm
 Depth 85 mm




S.4660
MASK FOR PLASTER BOARD WALLS
 for STEP WALL RECESSED
 Hole 204x46mm

24V d.c. LED versions are available on request



STEP BOLLARD h 450mm





S.4665 
 With leds white 6000K 236lm
 Rated luminaire luminous flux 22lm

S.4665W 
 With leds white 3200K 194lm
 Rated luminaire luminous flux 16lm

Rated input power 3W 230V

- COLOURS:
-  Aluminium grey (code .14)
 -  Rusty corten (code .18)

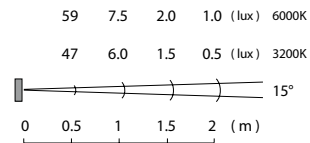

S.4663
FLANGE
 for STEP BOLLARD
 77 x 58 mm flange to be fixed in concrete with stainless steel screws.

